





N-TOPCon Solar Cell 182 10BB Bifacial

**Max Efficiency 24.8%**


Product Technical Specifications CC004

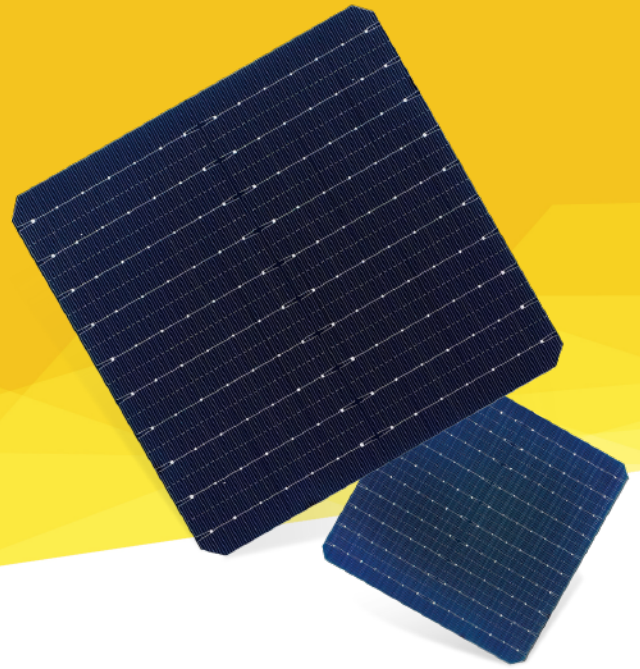

**PRODUCT APPEARANCE CC-ZC-PS-04**

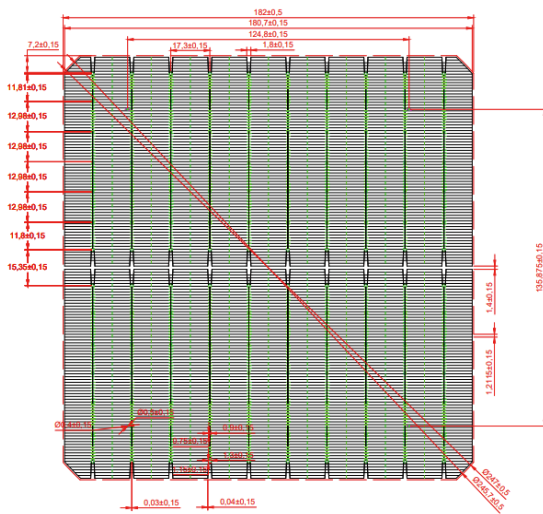

Front

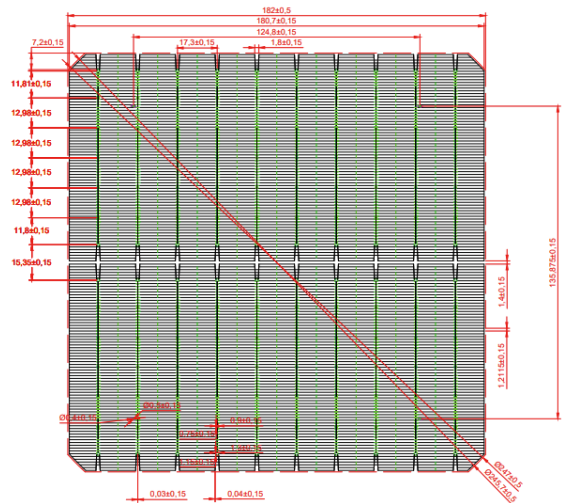

Back

**TECHNICAL DATA& DESIGN**


Dimension:	182mmx182mm±0.25mm, Φ247mm±0.25mm	Tk Voltage:	-0.25 %/K
Thickness:	140±20μm	Tk Current:	+0.045%/K
Front(-):	10*0.03±0.015mm busbars (silver),150 fingers, blue anti-reflecting coating (silicon nitride)	Tk Power:	-0.30%/K
Back(+):	10*0.03±0.015mm busbars (silver), 150 fingers, blue anti-reflecting coating (silicon nitride)		/

## LIGHT INTENSITY

Intensity(W/m <sup>2</sup> )	Uoc	Isc
1000	1.000	1.000
800	0.99	0.8
600	0.98	0.6
400	0.96	0.4
200	0.93	0.2

Voc(Isc) measured at 1000W/m<sup>2</sup>, the extent of Voc(Isc) decreasing with light intensity.


## IV CURVE

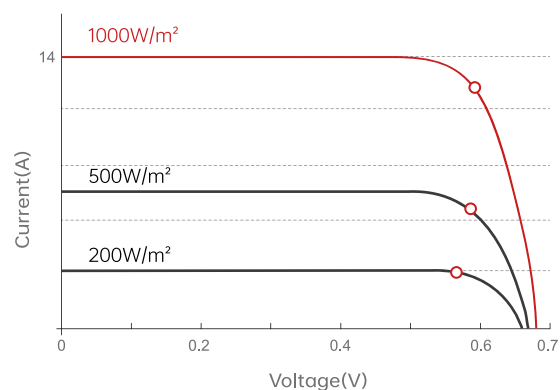

## PACKING CONFIGURATION (40'HC)

Packaging size	495±5mm * 320±5mm * 250±5mm	
Weight	10 g/pcs	18 kg/package
Quantity	1680 pcs/package	24 packages/pallet
	22 pallets/container	887040 pcs

## SPECTRAL RESPONSE

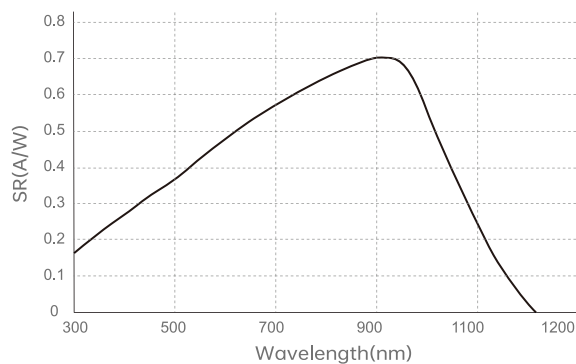

## ELECTRICAL CHARACTERISTICS

Efficiency Eta (%)	Maximum Power Pmpp (W)	Maximum Voltage Umpp (V)	Maximum Current Impp (A)	Open Circuit Voltage Uoc (V)	Short Circuit Voltage Isc (A)	Fill Factor FF (%)
Eta24.8%	8.19	0.63	13.005	0.718	13.680	83.36
Eta24.7%	8.16	0.628	12.993	0.717	13.660	83.26
Eta24.6%	8.12	0.626	12.982	0.716	13.640	83.16
Eta24.5%	8.09	0.624	12.971	0.715	13.620	83.06
Eta24.4%	8.06	0.622	12.96	0.714	13.600	82.96
Eta24.3%	8.02	0.62	12.948	0.713	13.579	82.86
Eta24.2%	7.99	0.618	12.937	0.712	13.559	82.76
Eta24.1%	7.96	0.616	12.925	0.711	13.538	82.66
Eta24.0%	7.92	0.614	12.913	0.710	13.517	82.56
Eta23.9%	7.88	0.612	12.876	0.709	13.495	82.46
Eta23.8%	7.85	0.610	12.869	0.708	13.480	82.36

STC (Standard Testing Conditions): Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25 °C , Spectra at AM1.5.

The Above Technical Parameters are Subject to Technical Changes and Tests, Qn-SOLAR PV LIMITED Reserves the Right of Final Interpretation.



Web: [www.qn-solarpv.com](http://www.qn-solarpv.com) E-mail: [info@qn-solarpv.com](mailto:info@qn-solarpv.com)

\* The technical parameters contained in this datasheet may deviate slightly, and QnSolar does not guarantee that they are completely accurate. Due to continuous innovation, research and development and product improvement, QnSolar reserves the right to adjust the information in this datasheet at any time without prior notice. The customer should obtain the latest version of datasheet when signing the contract and make it an integral part of the binding contract signed by both parties. The Chinese (or other language) translation files of this datasheet are for reference only. If there is any inconsistency between the English version and the Chinese version (or other language versions), the English version shall prevail.



View Our Web